

Planterboxdirect.com – Extension Connection, Inside Corner, Bracing Instructions

1. Locate all parts.
 - a. Extension Connection- 2 Outside Corners, 9 Screws
 - b. Inside Corner- 3 Outside Corners, 12 Screws
 - c. Bracing- 2 braces, 1 screw
2. Start by removing the protective plastic from the outside corners.
3. Locate the HEM section of the corners (top)

Extension Connection - Used for Extension kits OR joining 2 panels together

4. Locate (2) outside corner pieces from your box. With the Hem end up, place the (2) corners paint side down to make a 'W'.
5. Align the (3) piloted holes. Using a ¼ bit and the screws included, screw in the top leaving the center and bottom out for bracing.

Inside Corner - Used for U & L shaped planter boxes OR joining panels to make a 90° turn


6. Locate (3) more outside corners from your box. Perform steps 4 & 5 to make an extension connection. Place another corner in the same direction to your existing extension connection and screw the top holes. You should have made an inside corner.

Bracing- Used to connect Left & Right extension connections OR extension Connection to Inside corner

7. Attach 1 end of the brace to the center of the extension connection OR inside corner.
8. Attach the other side of the brace to the bottom of the adjacent side using (1 screw).
9. Do this for each brace throughout the box and each extension connection OR inside corner.
10. Finally, using (1) screw, screw the center of each brace.



Required tools (not included) (Drill, ¼" driver or Ratchet with ¼" drive)

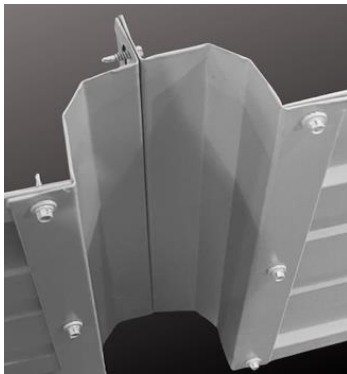

-Extension Connection



- Inside Corner



- Bracing

